

YOU NEVER KNOW WHAT CHALLENGES  
YOU WILL FACE. THAT'S WHY YOU  
ARM YOURSELF WITH VERSATILE  
TOOLS THAT CAN HELP YOU GET THE  
JOB DONE. AND WHY SHURTAPE OFFERS  
A FULL LINE OF TAPES THAT ARE  
ENGINEERED FOR PERFORMANCE.


FROM EXCELLENT ADHESION AND HOLDING  
POWER TO EASY HAND TEARABILITY AND  
CLEAN REMOVAL, YOU CAN TRUST SHURTAPE TO  
DELIVER THE PRODUCT FEATURES YOU CAN RELY  
UPON TO GET THE JOB DONE QUICKLY AND  
EFFICIENTLY TO SAVE YOU TIME AND MONEY.

### EV 57B



General purpose grade, 7.0 mil vinyl insulating tape for use in a variety of mechanical and electrical applications. UL Listed and CSA Approved, EV 57B is a highly conformable, lead free and flame retardant black electrical tape for use indoors and out.

### EV 57C

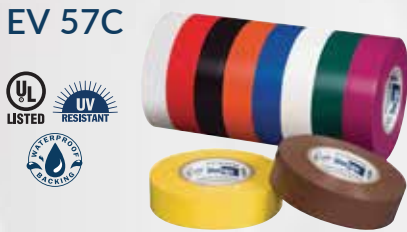

General purpose grade, 7.0 mil vinyl insulating tape for use in a variety of mechanical and electrical applications, including color-coding and phasing tasks. EV 57C is UL Listed and CSA Approved, and is a highly conformable, lead free and flame retardant colored electrical tape for use indoors and out.

### EV 77B



Professional grade, 7.0 mil, all-weather vinyl insulating tape used for electrical and mechanical protection in temperatures ranging from 0 F to 220 F. UL Listed and CSA Approved, EV 77B black electrical tape is lead free, flame retardant, and is engineered with a polymeric backing construction, as well as a specialized method of bonding the adhesive to the vinyl backing, which allows the tape to be highly conformable and deliver a moisture-tight seal, even in extreme temperatures.

### EV 77C



Professional grade, 7.0 mil, all-weather vinyl insulating tape used for color-coding and phase identification in electrical applications. UL Listed and CSA Approved, EV 77C colored electrical tape is lead free, flame retardant, and is engineered with a polymeric backing construction, as well as a specialized method of bonding the adhesive to the vinyl backing, which allows the tape to be highly conformable and deliver a moisture-tight seal, even in extreme temperatures.

### EV 97B



Premium grade, 8.5 mil, all-weather vinyl tape used for insulating electrical splices up to 600 V, as a jacketing on high voltage splices and repairs, and can also be used when wrapping wire harnesses and cables. EV 97B is UL Listed, CSA Approved, lead free and flame retardant, and is engineered with polymeric backing construction, as well as a specialized method of bonding the adhesive to the vinyl backing, which creates a highly conformable tape that delivers a moisture-tight seal.

### PW 100



General purpose, corrosion-resistant PVC tape for use on under and above ground pipe installations. PW 100 pipe wrap tape offers excellent moisture resistance and conformability to protect metal and plastic tubing.

### HP 100®



General purpose grade, 1.6 mil, hot melt packaging tape for sealing lightweight boxes. HP 100® is engineered with an aggressive, high-tack adhesive and excellent holding power to keep carton seals intact.

### HP 200®



Production grade, 1.8 mil, hot melt packaging tape for sealing medium-weight boxes. HP 200® is engineered with an aggressive, high-tack adhesive and excellent holding power to deliver secure carton seals.

### GS 490



Economy grade, 100 lb., fiberglass reinforced strapping tape for light duty strapping, packaging, bundling and palletizing applications. GS 490 offers good adhesion, quick stick and shock resistance for a range of tasks.

### GS 500



Utility grade, 150 lb., fiberglass reinforced strapping tape for general purpose strapping, packaging, bundling and palletizing jobs. Offering high adhesion and a backing that resists splitting and cracking, GS 500 tackles a variety of jobs with ease.

### AP 101®



General purpose grade, 1.6 mil, acrylic packaging tape designed for closure of lightweight boxes. Durable BOPP film provides strength and flexibility, while a high-quality adhesive gives AP 101® clarity, UV resistance, premium aging characteristics and low odor to tackle the task at hand.

### AP 201®



Production grade 2.0 mil, acrylic packaging tape for light- to medium-weight box sealing. AP 201® offers a 28 micron cast BOPP film backing and high-quality adhesive engineered to deliver clarity, UV resistance, premium aging characteristics and low odor.

### FP 97



General purpose grade flatback paper tape used for floor protection seaming, box sealing, splicing, binding, holding, tabbing, reinforcing, banding and patching applications. FP 97 is constructed with an aggressive adhesive that offers excellent holding power and a strong, flexible kraft backing.

### PE 333



Non-UV-resistant polyethylene film tape used to mask surfaces, such as windows and doors, during stucco application and painting, as well as for seaming underslab vapor barriers and holding poly-sheeting when building containments. Designed with a special, high-tack synthetic adhesive, PE 333 maintains a watertight seal, even in severe environments and weather conditions, and removes cleanly when the job is done.

### PE 444



UV-resistant polyethylene film tape used to mask surfaces, such as windows and doors, during stucco application and painting. PE 444 is a stucco masking tape engineered for outdoor use, offering a special, high-tack synthetic adhesive that maintains a watertight seal, even in severe environments and weather conditions, and clean removal when the job is done.

# Industrial Construction & Restoration Tapes



# Shurtape

TECHNOLOGIES

SHURTAPETECH.COM  
1.888.442.TAPE



All trademarks are registered trademarks owned by Shurtape Technologies, LLC, unless otherwise noted.

ISO 9001 CERTIFIED QUALITY SYSTEM  
© Shurtape Technologies, LLC 2022/MMC 00313



# Industrial Construction & Restoration Tapes

## CF 120 FrogTape®



Premium grade painter's tape for interior or exterior masking on cured painted walls, wood trim, glass and metal. CF 120/FrogTape® brand painter's tape is a multi-surface painter's tape made with PaintBlock® Technology, a super-absorbent polymer that reacts with latex paint and instantly gels to form a micro-barrier that seals the edges of the tape to prevent paint bleed and deliver very sharp paint lines.

## CP 130 FrogTape®



Multi-surface painter's tape for use in paint and masking applications that demand professional performance and 14-day clean removal. CP 130/FrogTape® Pro Grade painter's tape combines the value of a traditional blue painter's tape with PaintBlock® Technology, which forms a micro-barrier to seal the edges of the tape to prevent paint bleed and deliver the sharp paint line performance you expect from FrogTape® brand.

## CP 199 FrogTape®



Premium grade orange paint masking tape for use in painting and general purpose applications that demand a flexible, conformable tape. CP 199 high adhesion orange painter's tape makes quick work of prep work, delivering quick stick and 3-day clean removal for professional results.

Does not contain PaintBlock® Technology.

## PC 745 T-REX®



Super-tough, premium co-extruded cloth tape for all-weather use on rough surfaces and for heavy duty jobs. PC 745/T-REX® combines a waterproof, reinforced backing with twice the adhesive to deliver a ferociously strong tape with unrivaled staying power.

## PC 9 Duck Pro® by Shurtape®



Combining the brands you know with the quality and performance you trust, the Duck Pro® by Shurtape® portfolio of duct tapes includes utility and general purpose grades for applications like bundling, sealing and repairing to professional and premium grades to tackle applications that demand aggressive stick and superior hold. Our flagship PC 9S and PC 9C silver and colored Duck Pro® by Shurtape® contractor grade duct tapes feature aggressive adhesion, 30-day indoor clean removal and cold temperature performance to finish jobs with speed and ease.

## AF 914CT/975CT



Lined cold temperature aluminum foil tape for joining and sealing aluminum-backed and fibrous insulation and metal ductwork, and to repair metal and sheet metal. Both AF 914CT and AF 975CT deliver an airtight seal in temperatures ranging from -20 F to 260 F. AF 914CT is 1.5 mil; AF 975CT is 2.0 mil.

## AF 984CT



UL 723 tested Foil/Scrim/Kraft (FSK) tape for sealing seams in scrim-reinforced duct insulation. Ideal for applications that demand a maximum-strength tape, AF 984CT is lined, offers an acrylic adhesive and can be used in temperatures ranging from -20 F to 260 F.

## AF 099



Aluminum foil HVAC tape for joining and sealing joints, connections and seams on rigid fiberglass ductboard and flexible air duct, and as a UL 181A-P listed product, can also be used in place of mechanical fasteners on rigid ductboard. UL 181A-P/B-FX Listed and printed, AF 099 delivers full system closure by forming airtight bonds on joints and seams in temperatures ranging from -20 F to 260 F and in humid conditions.

## CP 66®



Contractor grade, high adhesion masking tape for residential and commercial painting, holding and packaging, particularly those applications that demand quick stick and conformability to irregularly shaped surfaces. CP 66® is engineered with a rubber-based adhesive, unwinds easily and can be used in temperatures from 50 F to 150 F.

## CP 27®



Professional grade, medium adhesion painter's tape for interior and exterior masking of multiple surfaces, such as painted walls, glass, vinyl, metal and wood, when easy, no-residue removal is a must. CP 27® is designed with a rubber-based adhesive that prevents lifting and paint seepage, while allowing it to remove cleanly from surfaces without damage for up to 14 days to deliver superior results.

## CP 105



General purpose grade, medium-high adhesion masking tape for non-critical bundling and labeling applications. CP 105 provides excellent surface contact on a range of substrates.

## PC 609 Duck Pro® by Shurtape®



Professional grade cloth duct tape for use in a variety of industries, including in the HVAC industry to repair thermal insulation and seal metal ductwork; in the manufactured housing industry to seam bottom boards and for patching, seaming and sealing; and general purpose use for packaging, bundling, holding, wrapping and waterproofing. PC 609 Duck Pro® by Shurtape® co-extruded duct tape offers extremely aggressive adhesion and good conformability to a variety of surfaces.

## PC 667



Specialty grade, outdoor cloth duct tape used for protective masking of non-painted surfaces, including steel, vinyl, aluminum and anodized metals, in plastering, stucco, concrete, pool and tile applications where UV resistance is required. A co-extruded stucco masking tape, PC 667 offers 14-day UV resistance, clean removal and easy tearability for the task at hand.

## WHAT IS CO-EX?

For ultimate performance, choose Shurtape duct tapes with Polybonded CO-EX Technology®. The co-extrusion process melds polyethylene, cloth and adhesive in a single, high-temperature step, resulting in a permanent, airtight bond. This seamless construction creates added strength and will not delaminate.



## BT 100



Non-adhesive barricade tape for marking restricted areas and managing access to work sites by professionals in the safety, construction, utilities, hardware and other industries. BT 100 features 2-inch letters that are easy to read, is resistant to moisture and humidity and resists sagging for long-term use. Available text includes: Lead Hazard and Wet Paint (English only); Caution and Danger (available bilingual English/Spanish).

## BT 200



Non-adhesive woven barricade tape for marking restricted areas and managing access to work sites by professionals in the safety, construction, utilities, hardware and other industries. Ideal for both indoor and outdoor use, BT 200 resists sagging, even when stretched over long distances, and is engineered with durable woven fibers that can withstand a variety of temperature and environmental conditions.

## VP 410



UV-resistant SPVC line set tape, available in a variety of colors, used for general purpose floor, lane and aisle marking, color-coding and identification applications, as well as in the HVAC industry to wrap line sets, seam closed cell sponge insulation, and insulate air ducts and underground pipes. VP 410 is engineered with a non-corrosive adhesive and flexible backing; can be used in extensive temperature, moisture and humid conditions; and meets OSHA color-coding requirements.

## CP 225 FrogTape®



Performance grade, medium-high adhesion masking tape for use in moderate temperatures in the transportation and metal fabrication industries. For use in temperatures up to 225 F (for up to 30 minutes), FrogTape® 225 Gold is a user-friendly masking solution that delivers consistent paint lines, clean removal and conformability in a range of industrial applications.

Does not contain PaintBlock® Technology.

## FP 227



High adhesion masking tape, available in a variety of colors, including high-visibility fluorescents, used for labeling and color-coding tasks on a variety of surfaces, including vinyl, metal, glass, plastic and rubber. FP 227 is flexible, unwinds easily, and is resistant to abrasion and oil.

## MJ 100



Open weave fiberglass mesh tape used for reinforcing joints, seams and connections when paint-on mastic is used in HVAC applications, and can also be applied to drywall seams before the application of joint compound. MJ 100 drywall tape is self-adhering and offers superior strength compared to paper.

## CP 327




Professional grade blue containment tape for use on interior and exterior walls, glass, vinyl, metal and wood, when building containment systems for restoration, remodeling, remediation and abatement jobs. Built for strength and durability, CP 327 features a rubber-based adhesive that prevents containment failure, while allowing it to remove cleanly from surfaces without damage for up to 21 days to deliver superior results.

## PC 608 Duck Pro® by Shurtape®



General purpose grade, co-extruded abatement duct tape for use when building containments and a variety of other applications in remediation, restoration and abatement jobs, including mold and asbestos removal. PC 608 Duck Pro® by Shurtape® combines a high-tack, high-performing cold temperature adhesive with good conformability to a variety of surfaces to deliver exceptional performance when hanging poly-sheeting.

## DS 154



Professional grade, double-sided containment tape used for creating high-performance containment systems for restoration and remodeling tasks such as painting, cleaning, sanding, mold remediation, asbestos removal and more. Offers a premium painter's grade adhesive on one side for 21-day clean removal from a variety of surfaces and, on the other, an aggressive adhesive that securely holds poly-sheeting, plastic tarps and other protective coverings.

## VP 415



A SPVC film warning stripe tape used for lane marking and identification of safety zones and hazard areas. VP 415 is constructed with a flexible backing that is resistant to abrasion, UV light, acid, alkalides, oils, moisture, humidity and corrosion, and meets OSHA requirements for hazard markings.

