

FP 726



PRINTABLE, HIGH ADHESION COLORED FLATBACK PAPER TAPE

TYPICAL APPLICATIONS

- For identification labeling, color-coding, packaging closure and other applications where printing is necessary

PRODUCT FEATURES

- High adhesion
- Easy to unwind
- High tear resistance
- Directly printable with water- and solvent-based flexographic inks
- Available in a variety of vibrant colors

CONSTRUCTION

Overall Grade/Function: Printable

Backing: Colored, high-strength, impregnated rope paper

Adhesive: Rubber-based

STANDARD WIDTH(S)

24 mm 48 mm

STANDARD LENGTH(S)

55 m

Contact your Shurtape sales representative for other available sizes


APPLICABLE STANDARDS

ASTM D 6123/D 6123M-97 (2012), Type II; Meets Consumer Product Safety Commission requirements through conformance with ASTM D-4236

STORAGE AND USAGE CONDITIONS

Tape should be stored in its original packaging in a cool, dry area away from direct sunlight and should be used within 12 months of date of shipment. Surfaces to which tape is applied should be clean, dry and free of grease, oil or other contaminants.

COLOR(S)

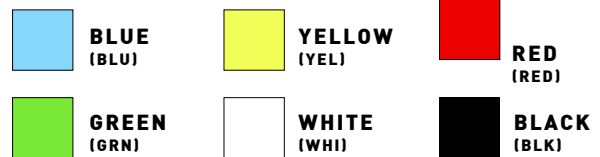

PHYSICAL PROPERTIES

	STANDARD	METRIC
Tensile Strength	45 lbs/in width	78.8 N/10 mm
Adhesion to Stainless Steel	72 oz/in width	7.88 N/10 mm
Thickness	6.6 mils	0.17 mm
Elongation	2.5%	2.5%
Maximum Service Temperature	150 F	66 C

Physical and performance characteristics shown above are obtained from tests recommended by PSTC, ASTM, government agencies or Shurtape Technologies, LLC, Quality Assurance and Technical Service departments and do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. The user should determine whether the product is fit for a particular purpose and is suitable for the user's method of application before use.

