


# DF 65



## GENERAL PURPOSE GRADE, DOUBLE-COATED FLAT PAPER TAPE

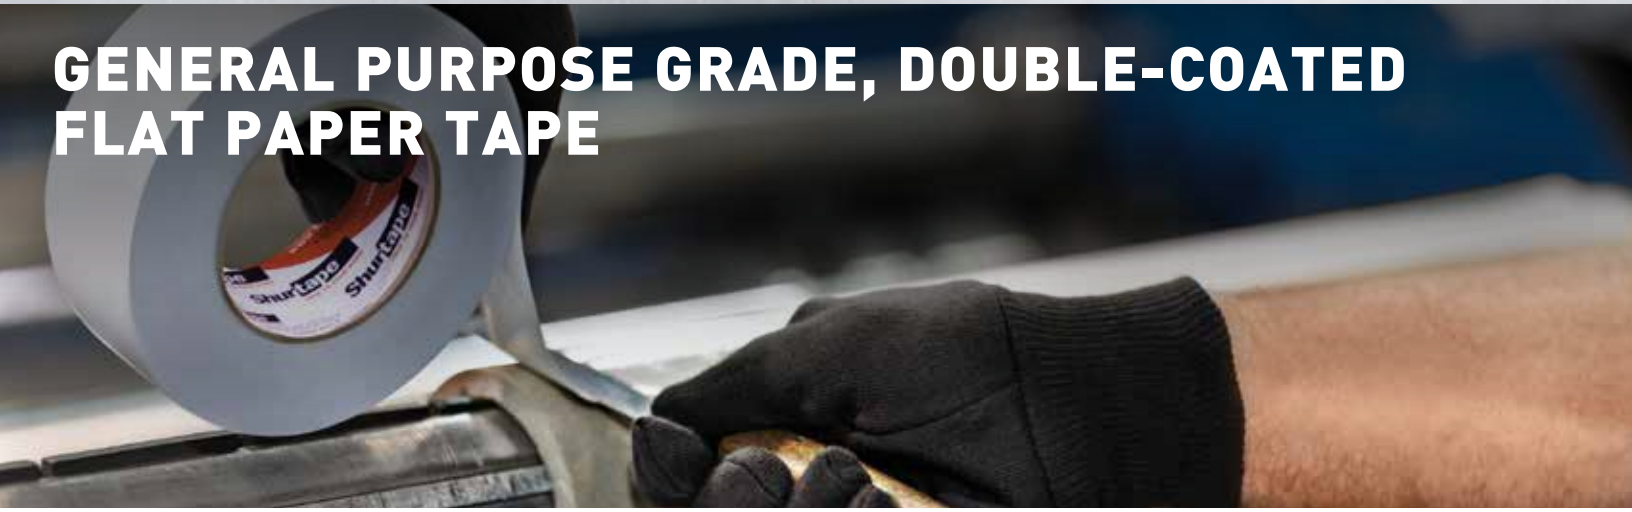

### TYPICAL APPLICATIONS

- For mounting, holding, splicing, tabbing and fastening applications that demand aggressive adhesion

### PRODUCT FEATURES

- Good tensile strength
- Superior adhesion to a variety of substrates
- Wrinkle-resistant tape and liner
- Durable
- Hand-tearable

### CONSTRUCTION

Overall Grade/Function: General Purpose

Backing: Flat paper

Adhesive: Rubber-based

Liner: Non-contaminating, siliconized, flat paper release liner

### STANDARD WIDTH(S)

½ in 18 mm 24 mm 36 mm 48 mm 72 mm

### STANDARD LENGTH(S)

36 yd 33 m

Contact your Shurtape sales representative for other available sizes

### STANDARD CORE SIZE

3 in

### APPLICABLE STANDARDS

CID A-A-180C, Type II, Grade B

### STORAGE AND USAGE CONDITIONS

Tape should be stored in its original packaging in a cool, dry area away from direct sunlight and should be used within 12 months of date of shipment. Surfaces to which tape is applied should be clean, dry and free of grease, oil or other contaminants.

### COLOR(S)



### PHYSICAL PROPERTIES

### STANDARD

### METRIC

Tensile Strength	33 lbs/in width	57.8 N/10 mm
Adhesion to Stainless Steel	65 oz/in width	7.11 N/10 mm
Thickness (Without Liner)	5.0 mils	0.13 mm
Elongation	3%	3%
Service Temperature Range	50 F to 225 F	10 C to 107 C

Physical and performance characteristics shown above are obtained from tests recommended by PSTC, ASTM, government agencies or Shurtape Technologies, LLC, Quality Assurance and Technical Service departments and do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. The user should determine whether the product is fit for a particular purpose and is suitable for the user's method of application before use.

