

## PRINTABLE, LOW TEMPERATURE, HIGH ADHESION COLORED FLATBACK PAPER TAPE

### TYPICAL APPLICATIONS

- For general purpose packaging, bundling, holding, binding, splicing, labeling, color-coding, banding, decorating and identification

### PRODUCT FEATURES

- High adhesion
- Flexible
- Oil-resistant
- Performs in low temperatures
- Available in a variety of vibrant colors

### CONSTRUCTION

Overall Grade/Function: Printable, low temperature

Backing: Colored flatback paper

Adhesive: Rubber-based

### STANDARD WIDTH(S)

18 mm    24 mm    48 mm

### STANDARD LENGTH(S)

55 m

Contact your Shurtape sales representative for other available sizes


### APPLICABLE STANDARDS

ASTM D 6123/D 6123M-97 (2012), Type II

### STORAGE AND USAGE CONDITIONS

Tape should be stored in its original packaging in a cool, dry area away from direct sunlight and should be used within 12 months of date of shipment. Surfaces to which tape is applied should be clean, dry and free of grease, oil or other contaminants.

### COLOR(S)

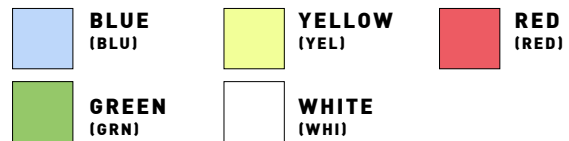

### PHYSICAL PROPERTIES    STANDARD    METRIC

Tensile Strength	30 lbs/in width	52.5 N/10 mm
Adhesion to Stainless Steel	52 oz/in width	5.69 N/10 mm
Thickness	5.4 mils	0.14 mm
Elongation	3%	3%
Service Temperature Range	32 F to 150 F	0 C to 66 C

Physical and performance characteristics shown above are obtained from tests recommended by PSTC, ASTM, government agencies or Shurtape Technologies, LLC, Quality Assurance and Technical Service departments and do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. The user should determine whether the product is fit for a particular purpose and is suitable for the user's method of application before use.

