

PC 625



MILITARY SPEC, LUSTERLESS CLOTH DUCT TAPE

TYPICAL APPLICATIONS

- For use as a premium, waterproof packaging tape that meets government specifications
- Can also be used for moisture-proofing cartons, canisters and tubing

PRODUCT FEATURES

- Excellent holding power
- High tensile strength
- Conformable

CONSTRUCTION

Overall Grade/Function: Military
Backing: Waterproof polyethylene film with a cloth carrier
Adhesive: Natural rubber

STANDARD WIDTH(S)

48 mm 72 mm

STANDARD LENGTH(S)

55 m
Contact your Shurtape sales representative for other available sizes


APPLICABLE STANDARDS

ASTM D 5486M-12, Type IV; PPP-T-60E, Type IV, Class I*
*Standard is obsolete and provided only as reference

STORAGE AND USAGE CONDITIONS

Tape should be stored in its original packaging in a cool, dry area away from direct sunlight and should be used within 12 months of date of shipment. Surfaces to which tape is applied should be clean, dry and free of grease, oil or other contaminants.

COLOR(S)

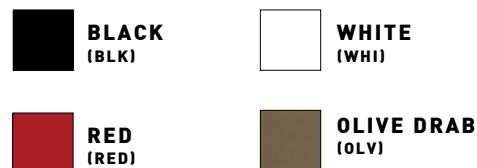

PHYSICAL PROPERTIES	STANDARD	METRIC
Tensile Strength	45 lbs/in width	78.8 N/10 mm
Adhesion to Stainless Steel	50 oz/in width	5.47 N/10 mm
Thickness	12.5 mils	0.32 mm
Elongation	12%	12%
Service Temperature Range	50 F to 200 F	10 C to 93 C

Physical and performance characteristics shown above are obtained from tests recommended by PSTC, ASTM, government agencies or Shurtape Technologies, LLC, Quality Assurance and Technical Service departments and do not represent a guarantee of product performance. Individual rolls may vary slightly from these averages. The user should determine whether the product is fit for a particular purpose and is suitable for the user's method of application before use.

